
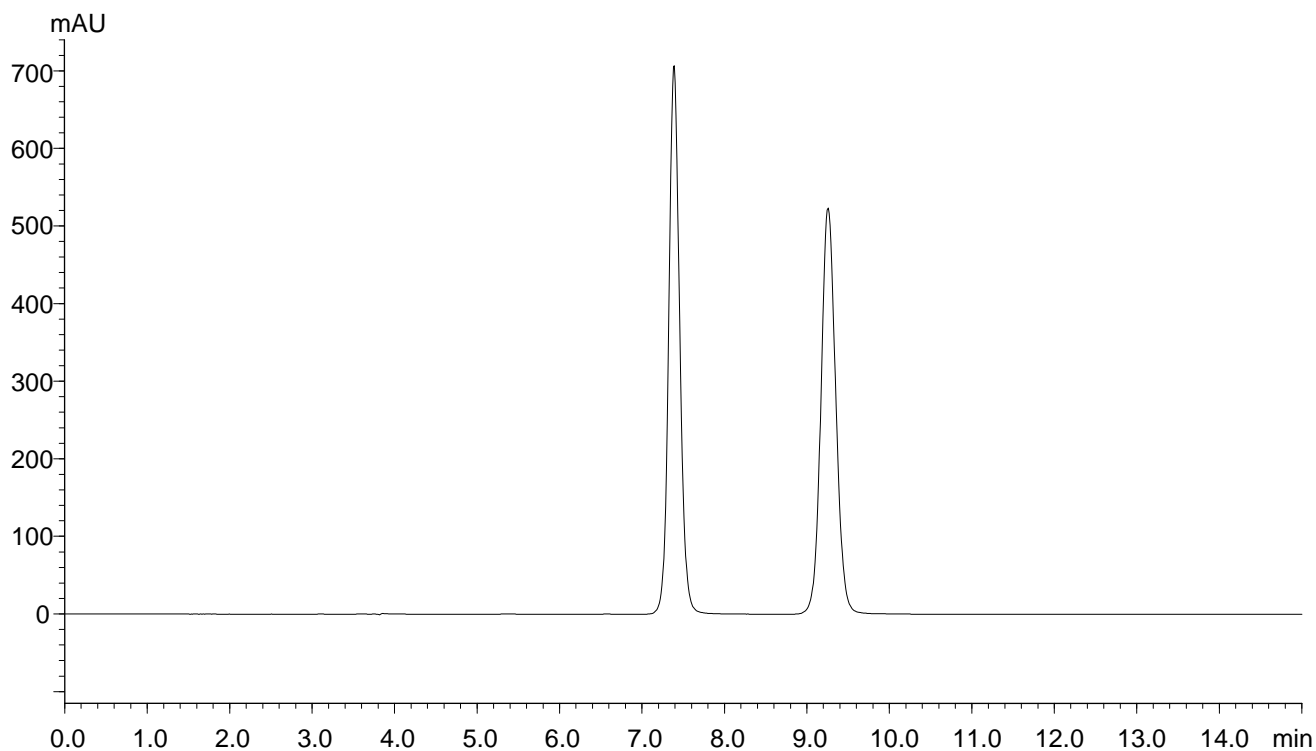


ケトロラック  
Ketrolac

H170821D

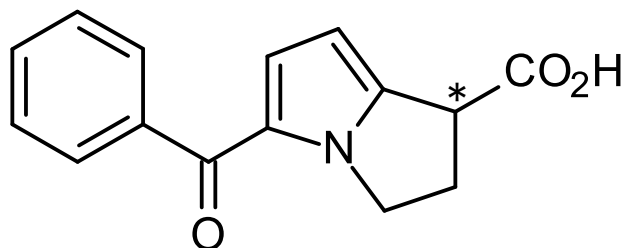

Column	: CHIRAL ART Cellulose-SJ (5 $\mu$ m) 250 X 4.6 mm I.D.
Eluent	: <i>n</i> -hexane/tetrahydrofuran/TFA (70/30/0.1)
Flow rate	: 1.0 mL/min
Temperature	: 25°C
Detection	: UV at 305 nm
Injection	: 5 $\mu$ L (1.0 mg/mL)