


ペオノール
 Paeonol

S971107A

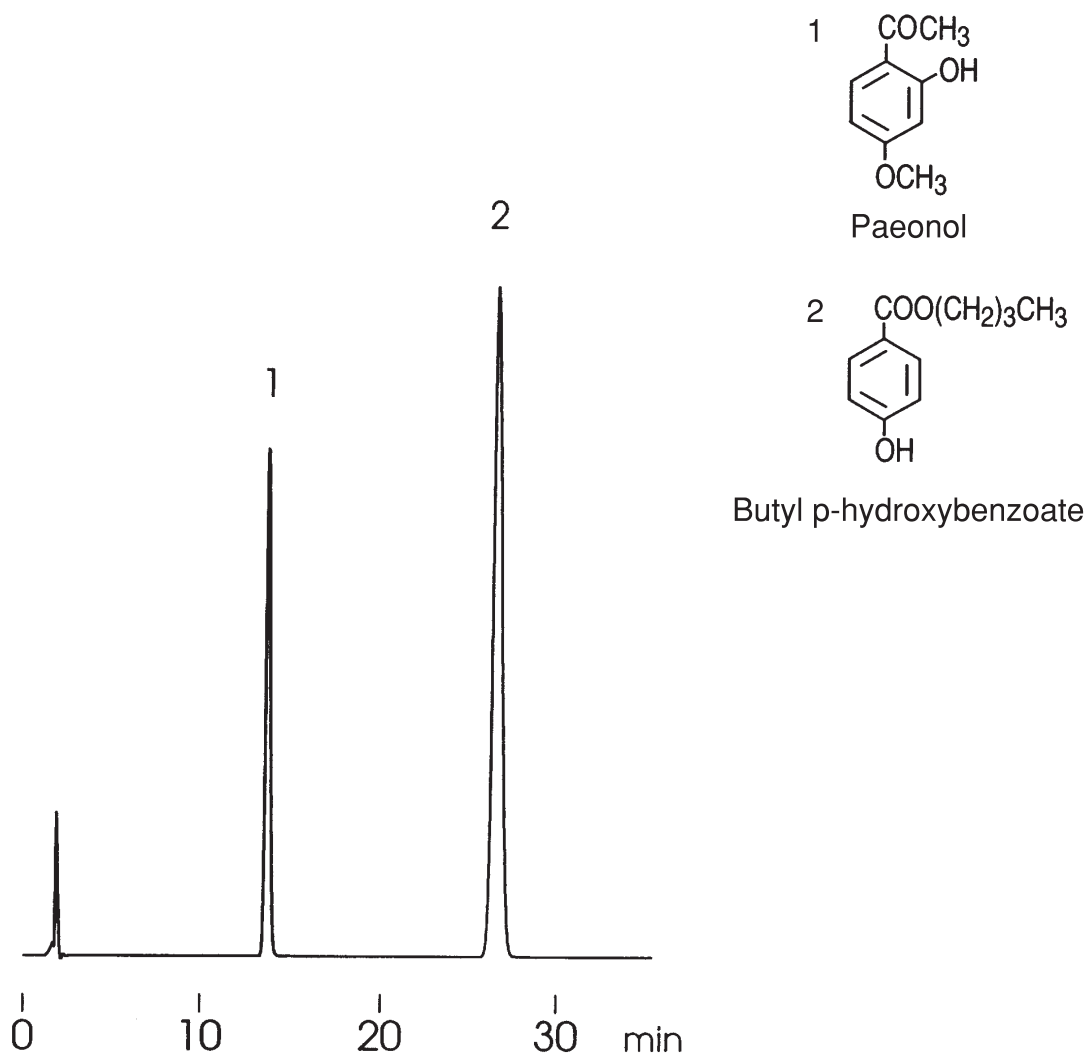

Column : YMC-Pack ODS-AQ (5 μ m, 12nm)
 150 \times 4.6 mm I.D.
 Eluent : acetonitrile/water/acetic acid (35/65/2)
 Flow rate : 1.0 mL/min
 Temperature : ambient (22 $^{\circ}$ C)
 Detection : UV at 274 nm, 0.26 AUFS
 Injection : 10 μ L (0.04, 0.2 mg/mL)
 (日本薬局方第13改正記載条件)